

HS2940

1A Low-Dropout Voltage Regulator

General Description

The HS2940 is a low dropout regulator designed to provide output current up to 1A with a typical 500mV dropout Voltage and a maximum of 1V. It is capable of reducing the ground current when the differential between the input voltage and the output voltage outrun 3V.

The HS2940 offers low quiescent current (typical current 30mA at 1A and an input-output differential of 5V). Higher quiescent currents only exist when the regulator is in the dropout mode ($V_{IN}-V_{OUT}\leq 3V$).


The HS2940 is available in SOT-223 ,TO-252 ,TO-220 and TO-263 package.

Features


- 500mV Typical Dropout at 1A
- Output Current In Excess of 1A
- Low Quiescent Current
- Reverse-Battery Protection
- Current Limit and Thermal Shutdown
- Mirror Image Insertion Protection

Applications





- Powering VGA & Sound Card
- LCD Monitor
- Battery Powered Equipments / Laptop & Notebook
- SMPS Post Regulator / DC to DC Modules
- High Efficiency Linear Power Supply
- Adjustable Power Supply
- Bar Code Scanners

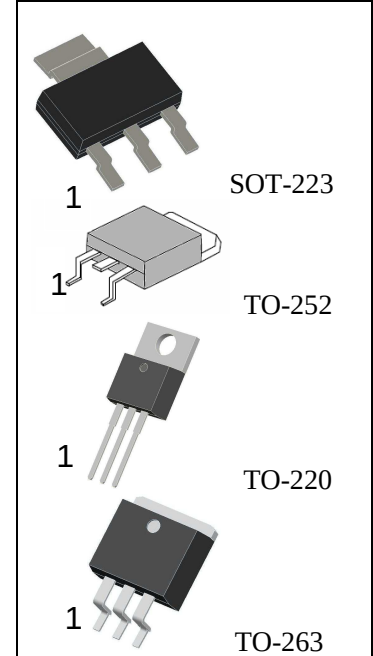

Functional Block Diagram

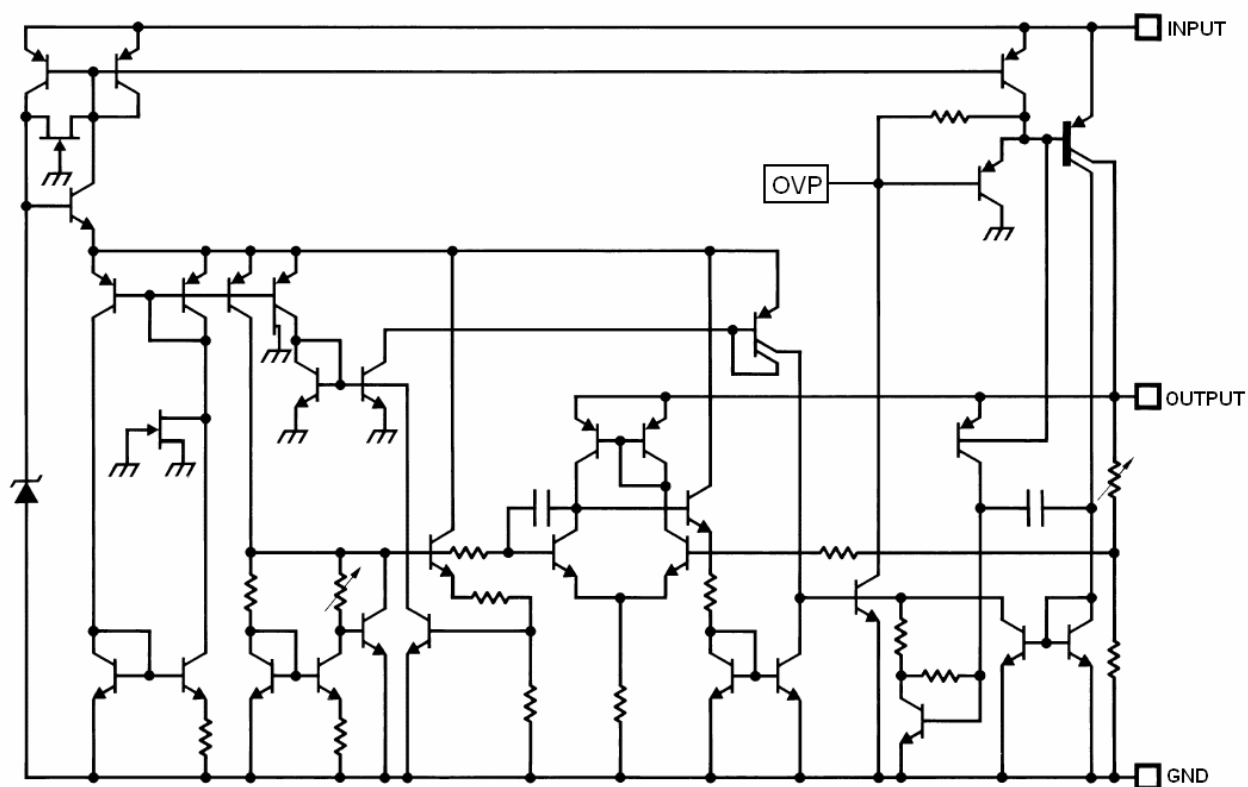

Pin Configuration

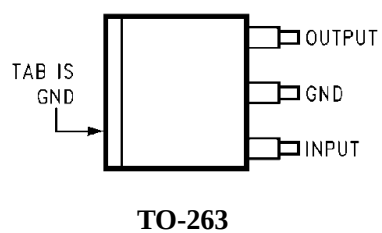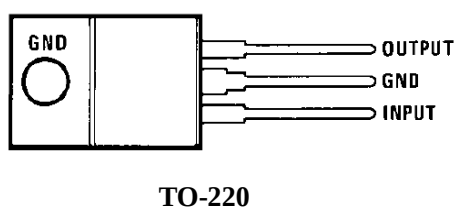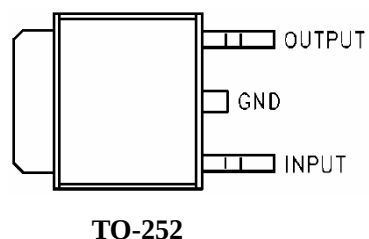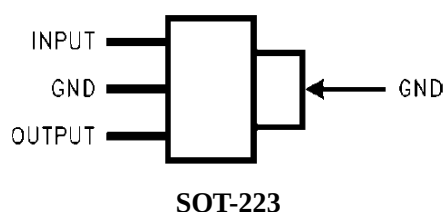

Pin Description

Pin Number		Pin Name	Function Description
SOT-223、TO-252 TO-220、TO-263	1	INPUT	Input pin
	2	GND	Ground
	3	OUTPUT	Output pin

Absolute Maximum Ratings (Ta=25°C) *Note

Parameter Name		Symbol	Value	Unit
Input Voltage		V _{in}	26	V
Internal Power Dissipation		P _D	Internally limited	
Maximum Junction Temperature		T _J	150	°C
Storage Temperature Range		T _{STG}	-65 ~ +150	°C
Operating Temperature	SOT-223	T _{OPR}	-40 ~ +85	°C
	TO-252		-40 ~ +125	
	TO-220		-40 ~ +125	
	TO-263		-40 ~ +125	

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

Electrical Characteristics

($V_{IN}=V_O+5V$, $I_{OUT}=1A$, $C_O=22\mu F$, $T_A = T_J = 25^\circ C$, Unless otherwise specified.)

Parameter Name	Symbol	Test Conditions	HS2940-5V			HS2940-8V			Unit
			Min	Typ	Max	Min	Typ	Max	
Output Voltage	V_{out}	$5mA \leq I_O \leq 1A$	$6.25V \leq V_{IN} \leq 26V$			$9.4V \leq V_{IN} \leq 26V$			V
			4.85	5.00	5.15	7.76	8.00	8.24	
Line Regulation	LNR	$V_O+2V \leq V_{IN} \leq 26V$ $I_O = 5mA$		20	50		20	80	mV
Load Regulation	LDR	$50mA \leq I_O \leq 1A$		35	50		55	80	mV
Output Impedance	R_o	$100mA_{DC}$ and $20mA_{rms}$, $f_o = 120Hz$		35			55		$m\Omega$
Quiescent Current	I_Q	$V_O+2V \leq V_{IN} \leq 26V$ $I_O = 5mA$		10	15		10	15	mA
Output Noise Voltage	e_N	$10Hz \sim 100kHz$, $I_O = 5mA$		150			240		μV_{rms}
Ripple Rejection	RR	$f_o = 120Hz$, $1V_{rms}$ $I_O = 100mA$	60	72		54	66		dB
Long Term Stability				20			32		$mV/1000Hr$
Dropout Voltage	V_D	$I_O = 1A$		0.5	0.8		0.5	0.8	V
		$I_O = 100mA$		110	150		110	150	mV
Short Circuit Current	I_{sc}		1.6	1.9		1.6	1.9		A
Maximum Line Transient	T_{IN}	$R_O = 100\Omega$ $T \leq 100ms$	60	75		60	75		V
Reverse Polarity DC Input Voltage	V_{RIN}	$R_O = 100\Omega$		-30	-15		-30	-15	V
Reverse Polarity Transient Input Voltage	V_{TRRI}	$R_O = 100\Omega$ $T \leq 100ms$		-75	-50		-75	-50	V

Note: Output current will decrease with temperature increase but will not drop below 1A at the maximum specified temperature.

Electrical Characteristics (Cont.)

($V_{IN}=V_O+5V$, $I_O=1A$, $C_O=22\mu F$, $T_A = T_J = 25^\circ C$, unless otherwise specified.)

Parameter Name	Symbol	Test Conditions	HS2940-9V			HS2940-10V			Unit
			Min	Typ	Max	Min	Typ	Max	
Output Voltage	V_{out}	$5mA \leq I_O \leq 1A$	$10.5V \leq V_{IN} \leq 26V$			$11.5V \leq V_{IN} \leq 26V$			V
			8.73	9.00	9.27	9.70	10.0	10.3	
Line Regulation	LNR	$V_O+2V \leq V_{IN} \leq 26V$ $I_O = 5mA$		20	90		20	100	mV
Load Regulation	LDR	$50mA \leq I_O \leq 1A$		60	90		65	100	mV
Output Impedance	R_o	$100mA_{DC}$ and $20mA_{rms}$, $f_o = 120Hz$		60			65		$m\Omega$
Quiescent Current	I_Q	$V_O+2V \leq V_{IN} \leq 26V$ $I_O = 5mA$		10	15		10	15	mA
Output Noise Voltage	eN	$10Hz \sim 100kHz$, $I_O = 5mA$		270			300		μV_{rms}
Ripple Rejection	RR	$f_o = 120Hz$, $1V_{rms}$ $I_O = 100mA$	52	64		51	63		dB
Long term Stability				34			36		$mV/1000Hr$
Dropout Voltage	V_D	$I_O = 1A$		0.5	0.8		0.5	0.8	V
		$I_O = 100mA$		110	150		110	150	mV
Short Circuit Current	I_{sc}		1.6	1.9		1.6	1.9		A
Maximum Line Transient	T_{IN}	$R_O = 100\Omega$ $T \leq 100ms$	60	75		60	75		V
Reverse Polarity DC Input Voltage	V_{RIN}	$R_O = 100\Omega$		-30	-15		-30	-15	V
Reverse Polarity Transient Input Voltage	V_{TRRI}	$R_O = 100\Omega$ $T \leq 100ms$		-75	-50		-75	-50	V

Note: Output current will decrease with temperature increase but will not drop below 1A at the maximum specified temperature.


Electrical Characteristics (Cont.)

($V_{IN}=V_O+5V$, $I_O=1A$, $C_O=22\mu F$, $T_A = T_J = 25^\circ C$, Unless otherwise specified.)

Parameter Name	Symbol	Test Conditions	HS2940-12V			HS2940-15V			Unit
			Min	Typ	Max	Min	Typ	Max	
Output Voltage	V_{out}	$5mA \leq I_O \leq 1A$	$13.6V \leq V_{IN} \leq 26V$			$16.75V \leq V_{IN} \leq 26V$			V
			11.64	12.0	12.36	14.55	15.0	15.45	
Line Regulation	LNR	$V_O+2V \leq V_{IN} \leq 26V$ $I_O = 5mA$		20	120		20	150	mV
Load Regulation	LDR	$50mA \leq I_O \leq 1A$		55	120		70	150	mV
Output Impedance	R_o	$100mA_{DC}$ and $20mA_{rms}$, $f_o = 120Hz$		80			100		$m\Omega$
Quiescent Current	I_Q	$V_O+2V \leq V_{IN} \leq 26V$ $I_O = 5mA$		10	15		10	15	mA
Output Noise Voltage	eN	10Hz-100kHz, $I_O = 5mA$		360			450		μV_{rms}
Ripple Rejection	RR	$f_o = 120Hz$, $1V_{rms}$ $I_O = 100mA$	54	66		52	64		dB
Long term Stability				48			60		$mV/1000Hr$
Dropout Voltage	V_D	$I_O = 1A$		0.5	0.8		0.5	0.8	V
		$I_O = 100mA$		110	150		110	150	mV
Short Circuit Current	I_{sc}		1.6	1.9		1.6	1.9		A
Maximum Line Transient	T_{IN}	$R_O = 100\Omega$ $T \leq 100ms$	60	75		60	75		V
Reverse Polarity DC Input Voltage	V_{RIN}	$R_O = 100\Omega$		-30	-15		-30	-15	V
Reverse Polarity Transient Input Voltage	V_{TRRI}	$R_O = 100\Omega$ $T \leq 100ms$		-75	-50		-75	-50	V

Note: Output current will decrease with temperature increase but will not drop below 1A at the maximum specified temperature.

Typical Application

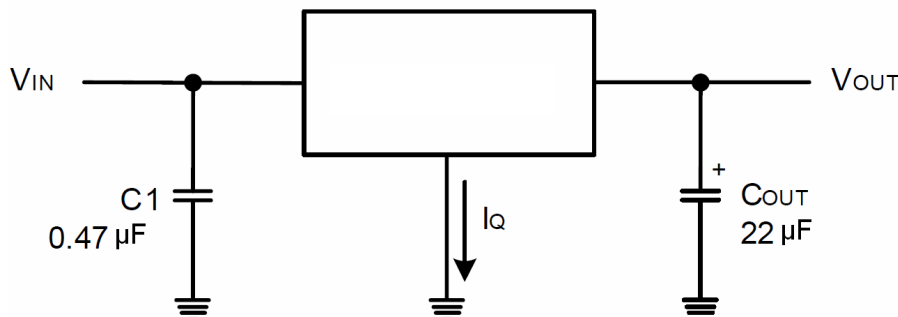

Note: 1.C1 is required if regulator is located far from power supply filter.

2.C_{OUT} must be higher than 22μF for stability, and locate as close as possible to the regulator.

Application Information

External Capacitors


The output capacitor is critical to maintaining regulator stability, and must meet the required conditions for both ESR (Equivalent Series Resistance) and minimum amount of capacitance.

Minimum Capacitance:

The minimum output capacitance required to maintain stability is 22 μF (this value may be increased without limit). Larger values of output capacitance will give improved transient response.

ESR Limits:

The ESR of the output capacitor will cause loop instability if it is too high or too low. The acceptable range of ESR plotted versus load current is shown in the graph below. It is essential that the output capacitor meet these requirements, or oscillations can result.

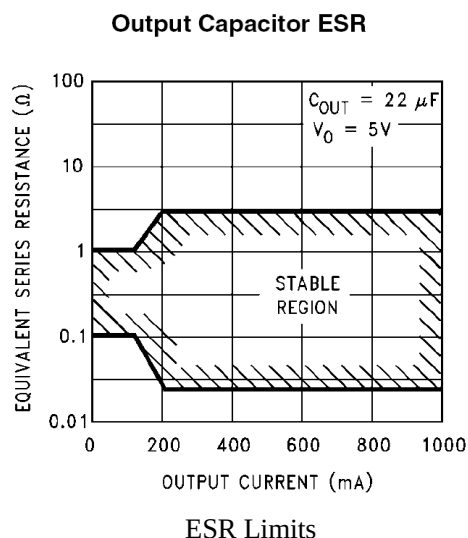







It is important to note that for most capacitors, ESR is specified only at room temperature. However, the designer must ensure that the ESR will stay inside the limits shown over the entire operating temperature range for the design.







For aluminum electrolytic capacitors, ESR will increase by about 30X as the temperature is reduced from 25°C to -40°C. This type of capacitor is not well-suited for low temperature operation.

Solid tantalum capacitors have a more stable ESR over temperature, but are more expensive than aluminum electrolytics. A cost-effective approach sometimes used is to parallel an aluminum electrolytic with a solid Tantalum, with the total capacitance split about 75/25% with the Aluminum being the larger value.


If two capacitors are paralleled, the effective ESR is the parallel of the two individual values. The “flatter” ESR of the Tantalum will keep the effective ESR from rising as quickly at low temperatures.

Characteristics Curve

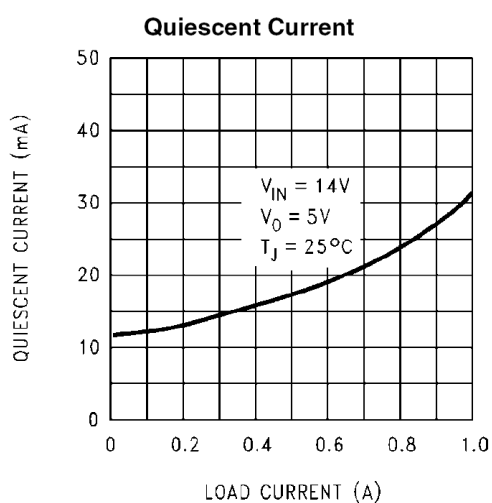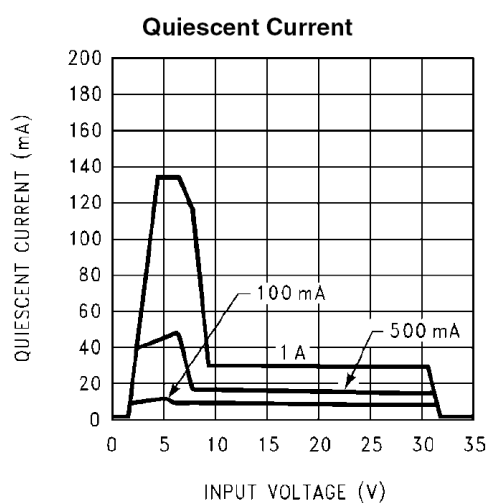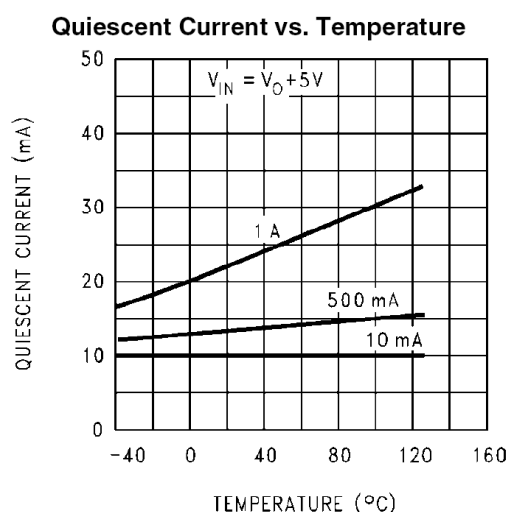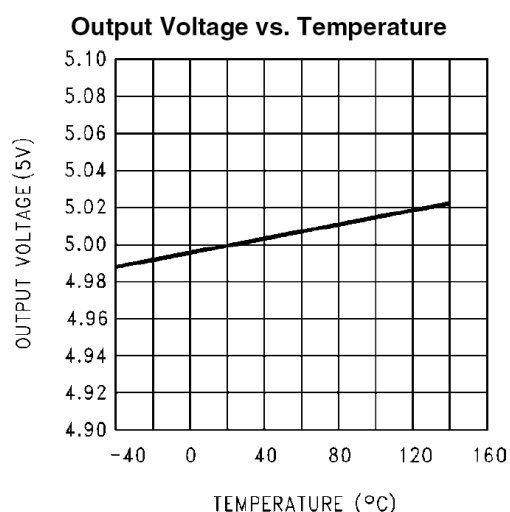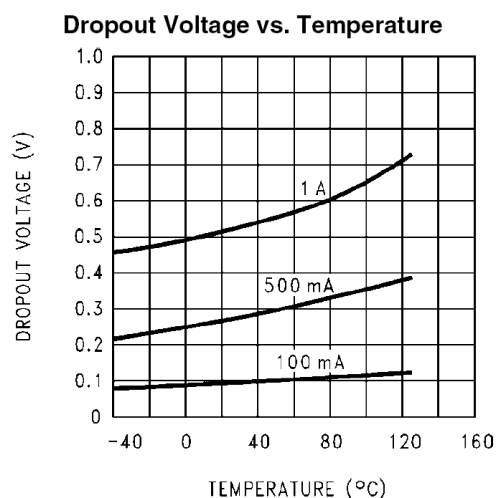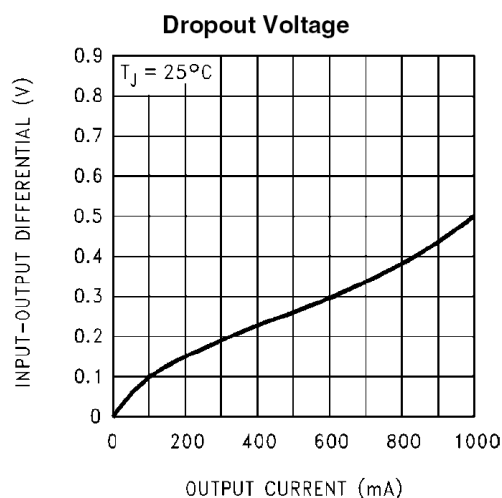


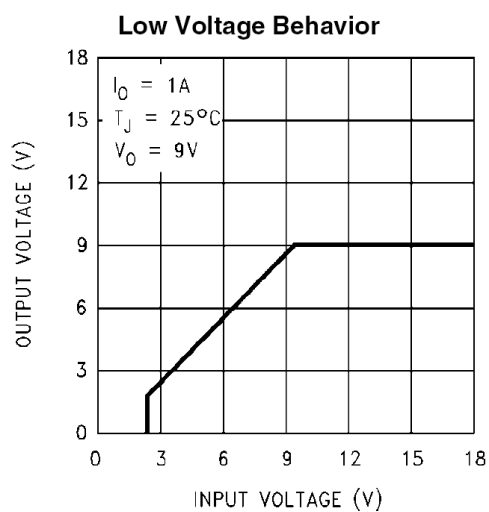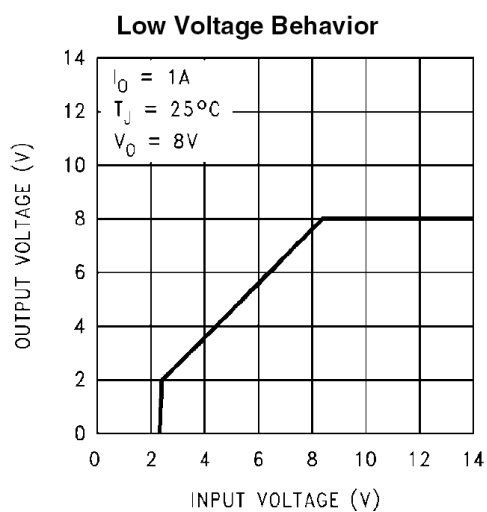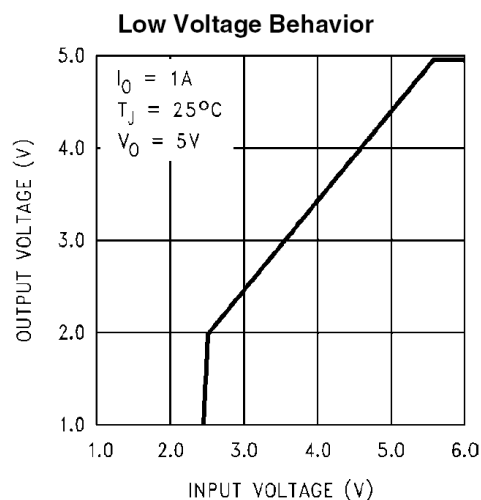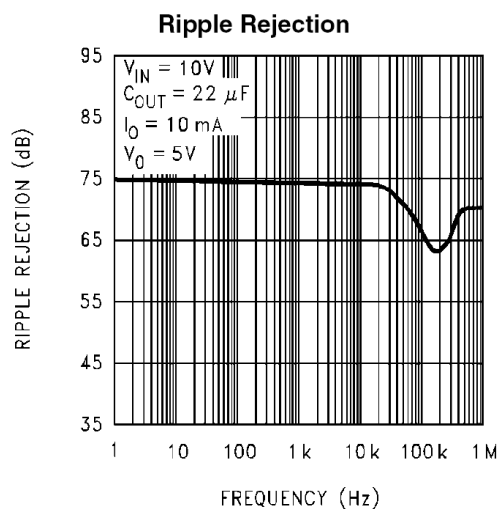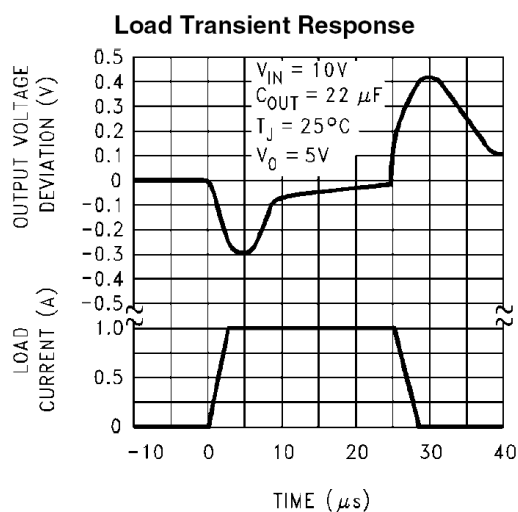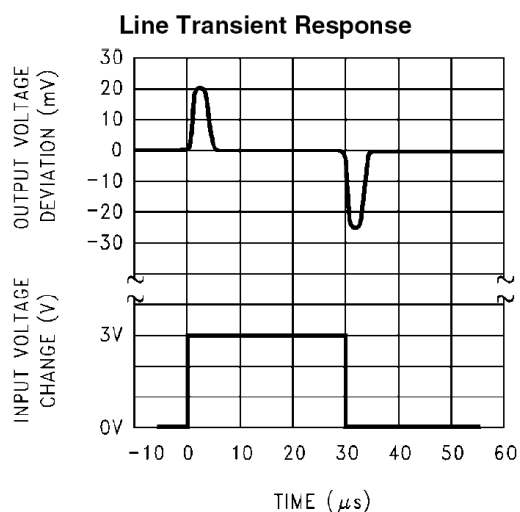


Low Voltage Behavior

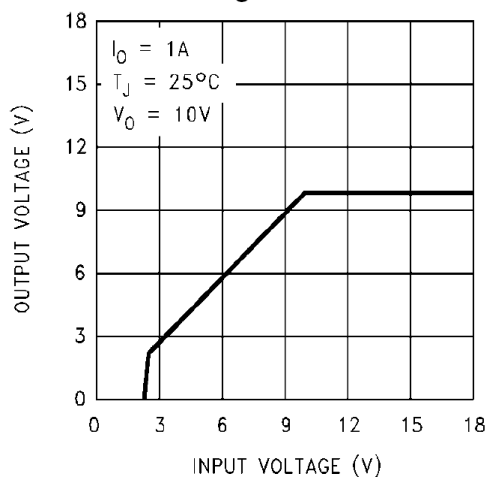


Low Voltage Behavior

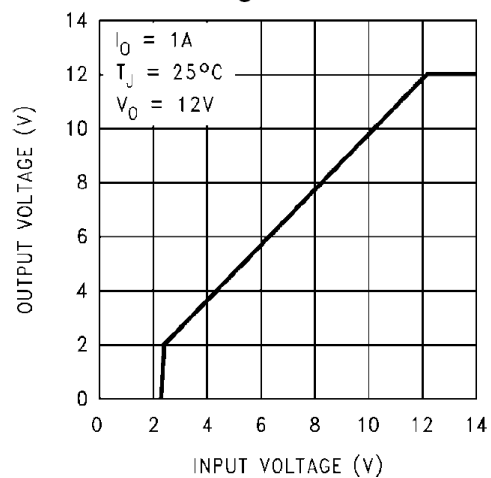


Low Voltage Behavior

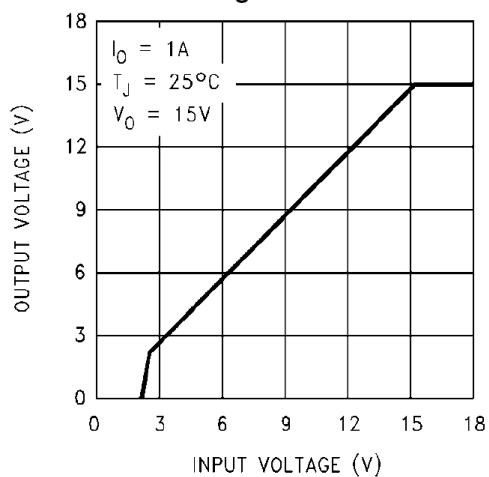


Output at Voltage Extremes






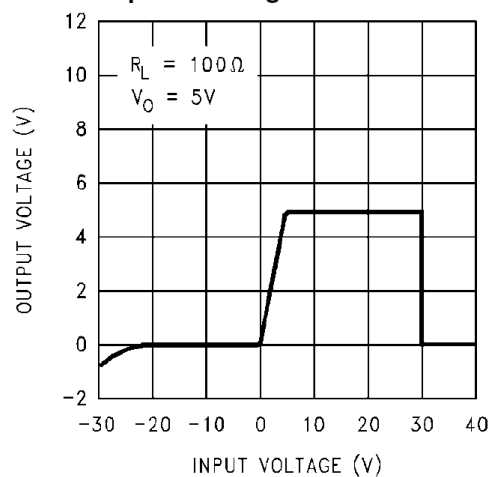


Output at Voltage Extremes

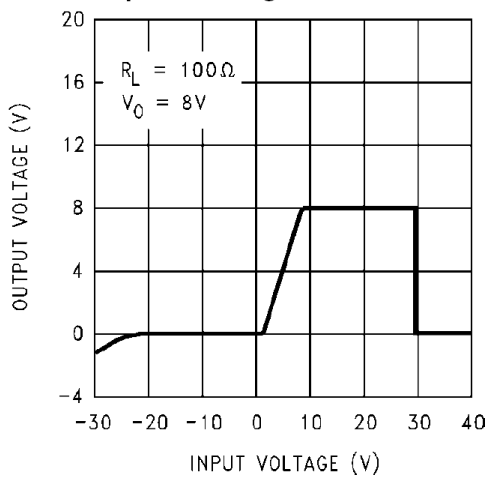

Output at Voltage Extremes

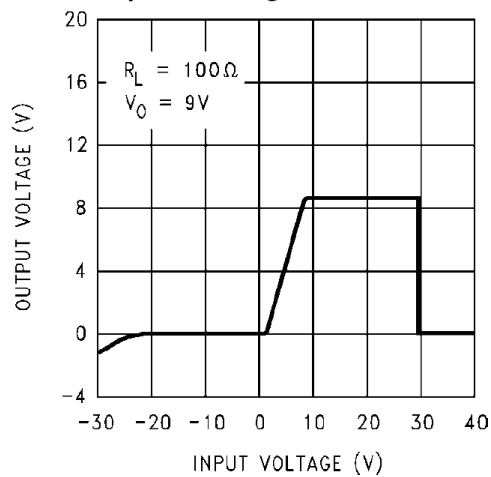

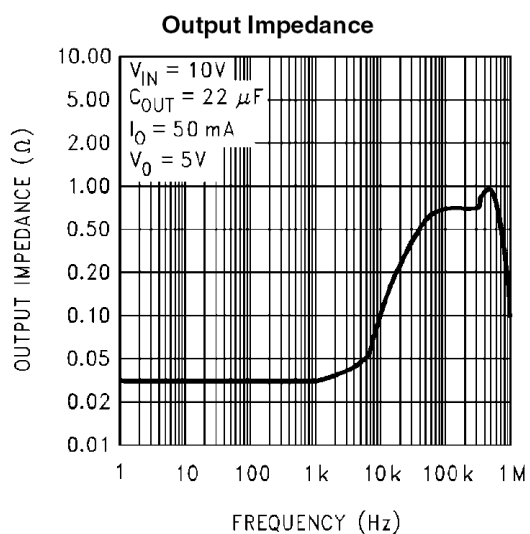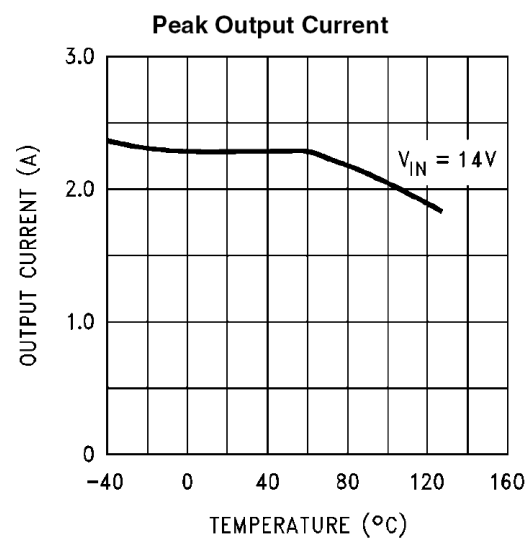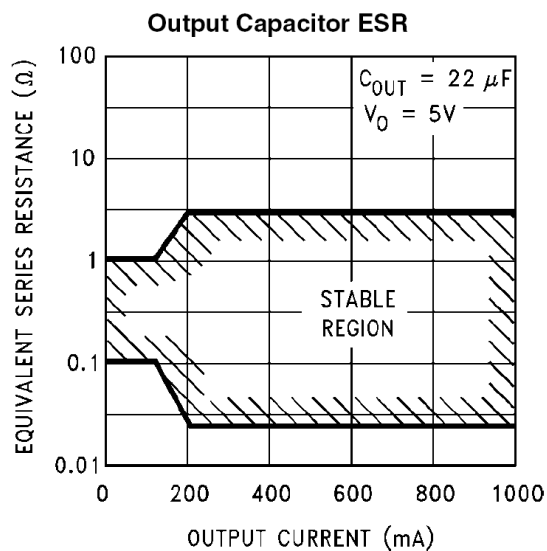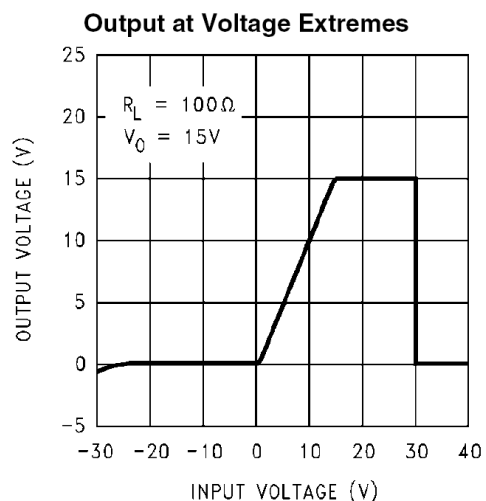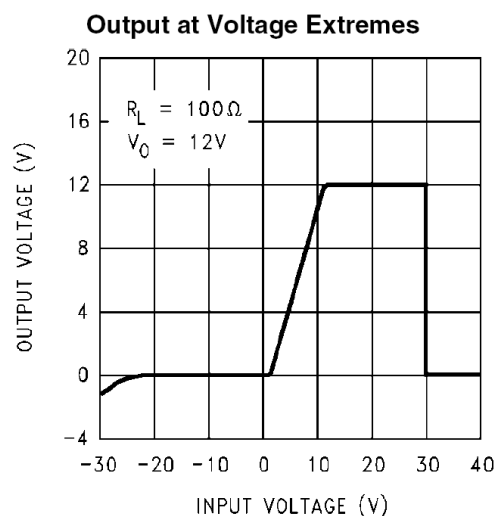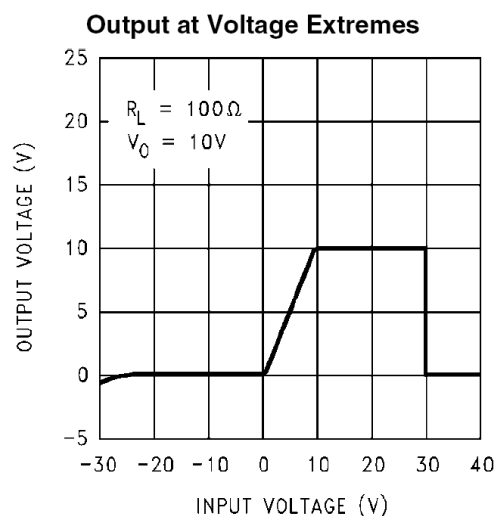

Outline Dimensions

TO-252

Unit: mm


The diagram illustrates the HS2940 TO-252 package in three views: top, side, and bottom. The top view shows a rectangular package with a central pad and two side pads. Dimensions include overall width (D), pad width (D1), height (B), total length (L), distance from center to side pad (L3), pad width (b1), pad thickness (b), distance from center to side pad (e), and distance from center to side pad (e1). The side view shows the package profile with dimensions for lead width (A), lead thickness (C1), lead height (A1), total height (E), lead length (L1), lead thickness (L2), and lead width (C). The bottom view shows the package from below with dimension V indicating the distance between the side pads.

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	2.200	2.400	0.087	0.094
A1	0.000	0.127	0.000	0.005
B	1.350	1.650	0.053	0.065
b	0.500	0.700	0.020	0.028
b1	0.700	0.900	0.028	0.035
c	0.430	0.580	0.017	0.023
c1	0.430	0.580	0.017	0.023
D	6.350	6.650	0.250	0.262
D1	5.200	5.400	0.205	0.213
E	5.400	5.700	0.213	0.224
e	2.300 TYP.		0.091 TYP.	
e1	4.500	4.700	0.177	0.185
L	9.500	9.900	0.374	0.390
L1	2.550	2.900	0.100	0.114
L2	1.400	1.780	0.055	0.070
L3	0.600	0.900	0.024	0.035
V	3.800 REF.		0.150 REF.	

SOT-223

Unit: mm


● SOT-223

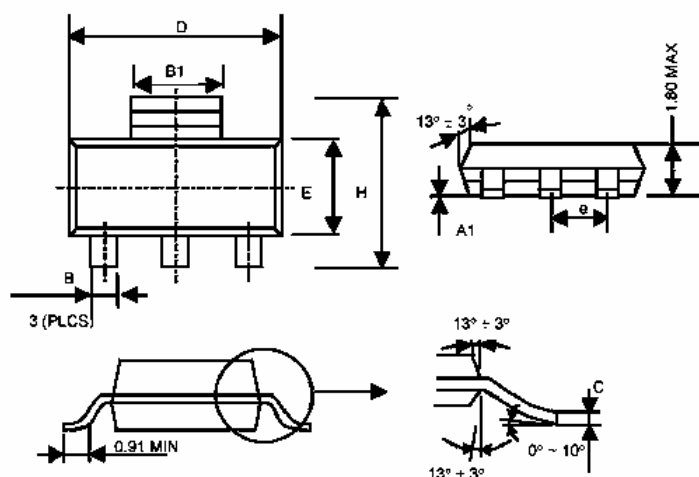

SYMBOL	MIN	MAX
A1	0.02	0.12
B	0.60	0.80
B1	2.90	3.15
C	0.24	0.35
D	6.30	6.80
E	3.30	3.70
e	2.30 (TYP.)	
H	6.70	7.30


TO-220

Unit: mm

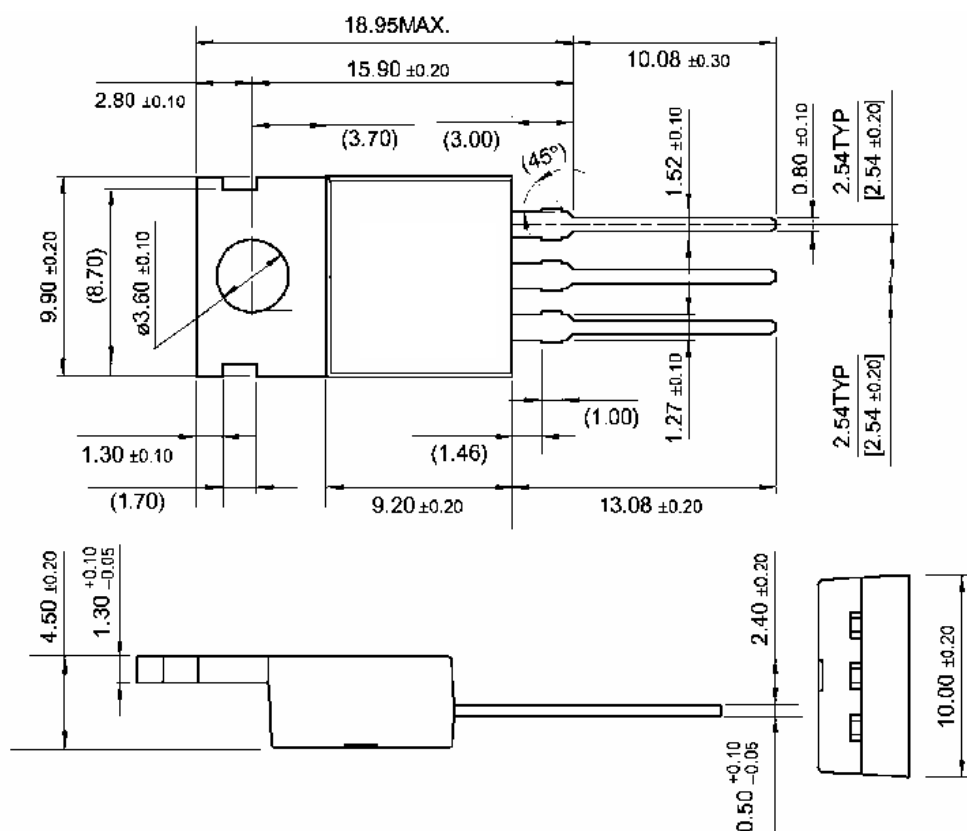

TO-263

Unit: mm

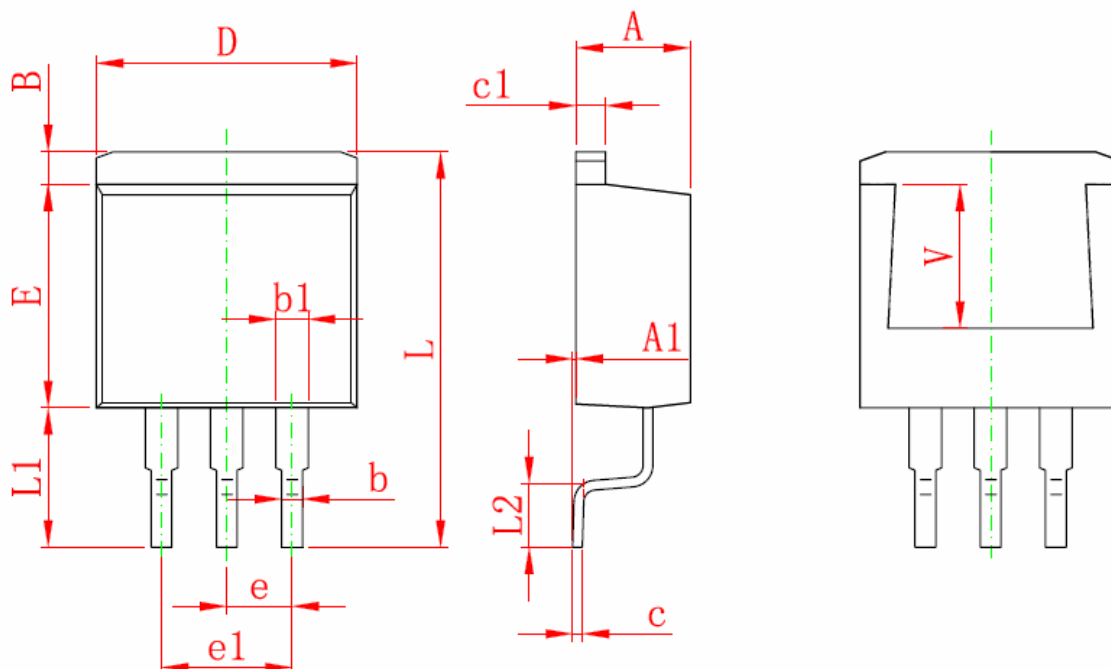

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	4.470	4.670	0.176	0.184
A1	0.000	0.150	0.000	0.006
B	1.170	1.370	0.046	0.054
b	0.710	0.910	0.028	0.036
b1	1.170	1.370	0.046	0.054
c	0.310	0.530	0.012	0.021
c1	1.170	1.370	0.046	0.054
D	10.010	10.310	0.394	0.406
E	8.500	8.900	0.335	0.350
e	2.540 TYP		0.100 TYP	
e1	4.980	5.180	0.196	0.204
L	15.050	15.450	0.593	0.608
L1	5.080	5.480	0.200	0.216
L2	2.340	2.740	0.092	0.108
V	5.600 REF		0.220 REF	

Statements

- Silicore Technology reserves the right to make changes without further notice to any products or specifications herein. Before customers place an order, customers need to confirm whether datasheet obtained is the latest version, and to verify the integrity of the relevant information.
- Failure or malfunction of any semiconductor products may occur under particular conditions, customers shall have obligation to comply with safety standards when customers use Silicore Technology products to do their system design and machine manufacturing, and take corresponding safety measures in order to avoid potential risk of failure that may cause personal injury or property damage.
- The product upgrades without end, Silicore Technology will wholeheartedly provide customers integrated circuits that have better performance and better quality.